




██████████, apertures 2,5 X 16 mm.
(Previous supplier)

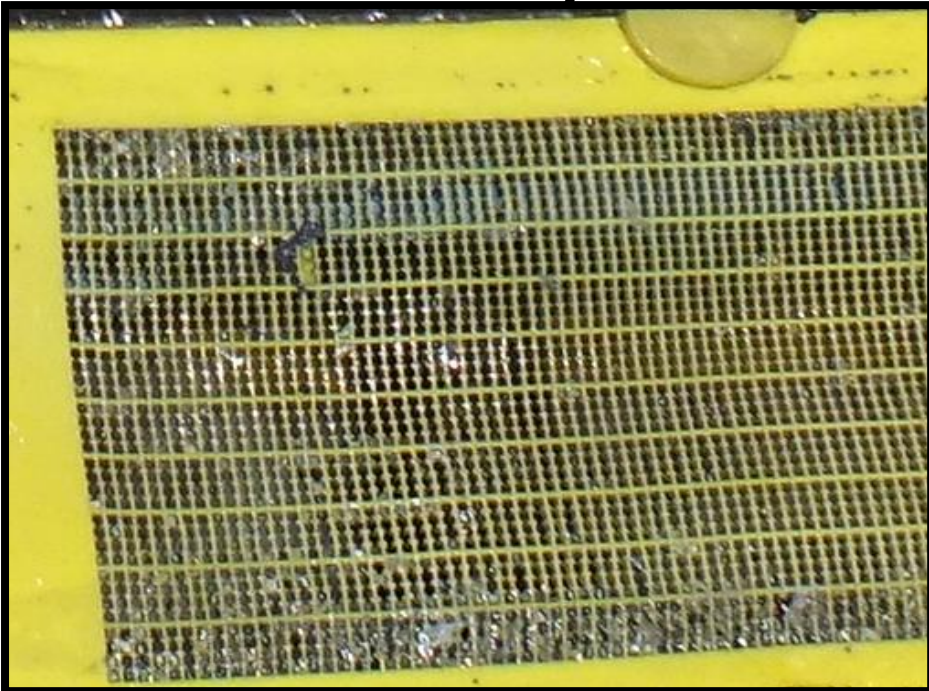

GET Flexy (after 1500 hours)

Capacity of compared machines

Parameter	№1 ([REDACTED]) <i>Previous supplier</i>	№2 (GET Flexy)
Feed rate, tn/h	39,5	47,00
Output rate by concentrate:	1,98	2,35

Size characteristics

Machine	Sampling point	Parameter	Grain-size fraction					Total	Output , %
			+6	-6+3	-3+2	-2+1	-1		
[REDACTED], panels TUSPU 830x1000x40/ 10; SLS 2,5x16	Top deck	Weight, kg	0,17	3,632	0,392	0,001	0,001	4,196	58,13
		%	4,051	86,559	9,342	0,024	0,024	100	
	Bottom deck	Weight, kg		0,385	1,946	0,473	0,218	3,022	41,87
		%	0,000	12,740	64,394	15,652	7,214	100	
EUROGOMMA, panels GET Flexy 277x3000x3	Top deck	Weight, kg	0,02	3,515	0,658	0,004	0,001	4,198	49,19
		%	0,476	83,730	15,674	0,095	0,024	100	
	Bottom deck	Weight, kg		0,018	2,655	1,187	0,477	4,337	50,81
		%	0,000	0,415	61,217	27,369	10,998	100	

E=a/b

Parameter	[REDACTED], panels TUSPU 830x1000x40/10; SLS 2,5x16	EUROGOMMA, panels GET Flexy 277x3000x3
Weight of under-deck material, kg (a)	2,64	4,32
Weight of feeding material, kg (b) , кг	3,42	5,00
screening efficiency (E)	77,20%	86,38%