




GET *flexy* is the polyurethane elastic screening system retrofitting every existing screen deck to transform it into a high efficiency technology.

Polyurethane and rubber 304,8x304,8mm screen panels are the world standard in mining but, not so rarely, the process requires the installation of steel wire screens for a number of reasons - efficiency increase, process material testing, cut size redefinition, laboratory requirements, etc.

Switching from a screen deck set for modular screen panels to cross tensioned wire screens can be very problematic.

In this environment we use **GET** *flexy*.

We supply 304,8x304,8mm polyurethane frames which are fastened to the deck with the standard pin & sleeve system. These frames stay on the deck on the long span.

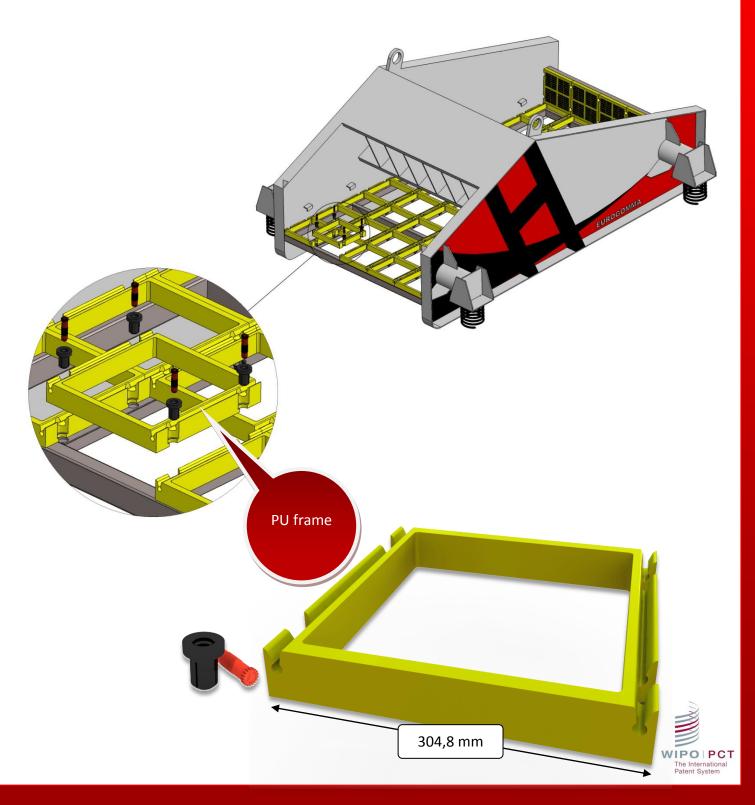



GET *flexy* steel wire screen panels are as long or wide as the screen deck - in accordance with the longwise or crosswise installation of the panels – and they are clamped into the polyurethane frames simply using a hammer.

Replacing the **GET** *flexy* steel wire screen panels with new ones just requires the removal of the old ones lifting them up and out with a lever (a screwdriver) and installing the new ones.





Via A. Verga N° 9 – 24127, Bergamo – Italy

Tel.: ++39 035 261 738 Fax.: ++39 035 257 447

Email: info@eurogomma.com
Http://www.eurogomma.com



www.get-flexy.com