

# EUROGOMMA


Spark free **polyurethane cutting edge for wheel loaders**




Flammable materials  
require special precautions.

Loading wood chips, lignite, phosphorus, sulphur, fluorite,  
etc. can be extremely hazardous because the steel buckets of  
wheel loaders may generate sparks when scraping on the ground.

Our polyurethane cutting edges for wheel loaders are spark free and prevent any risk of flaming.  
In consideration of the low friction coefficient and the high abrasion resistance of our polyurethane our  
cutting edges are a fantastic product for several loading applications.

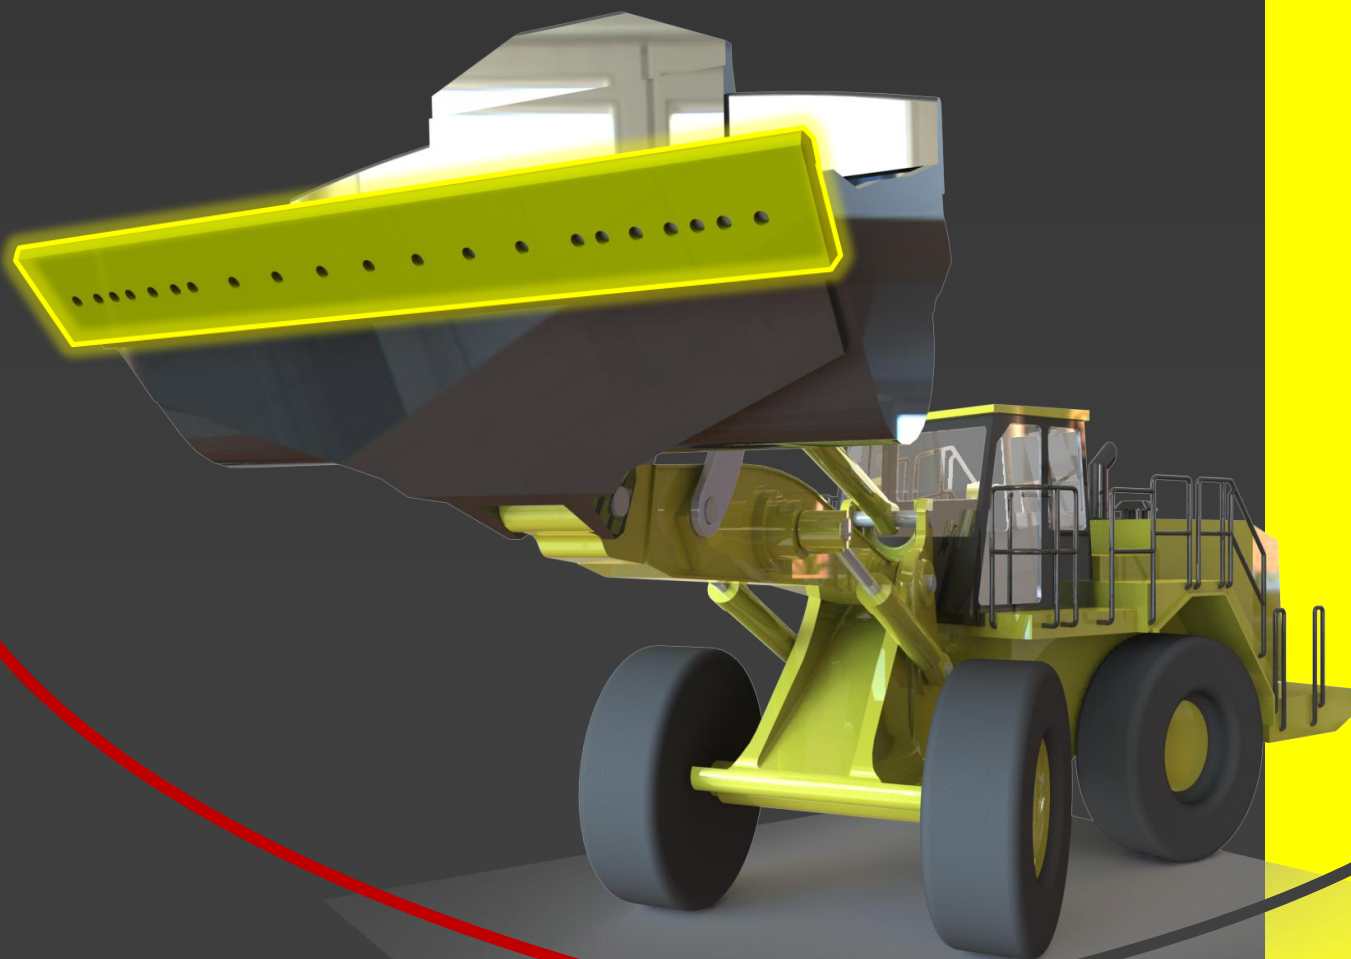

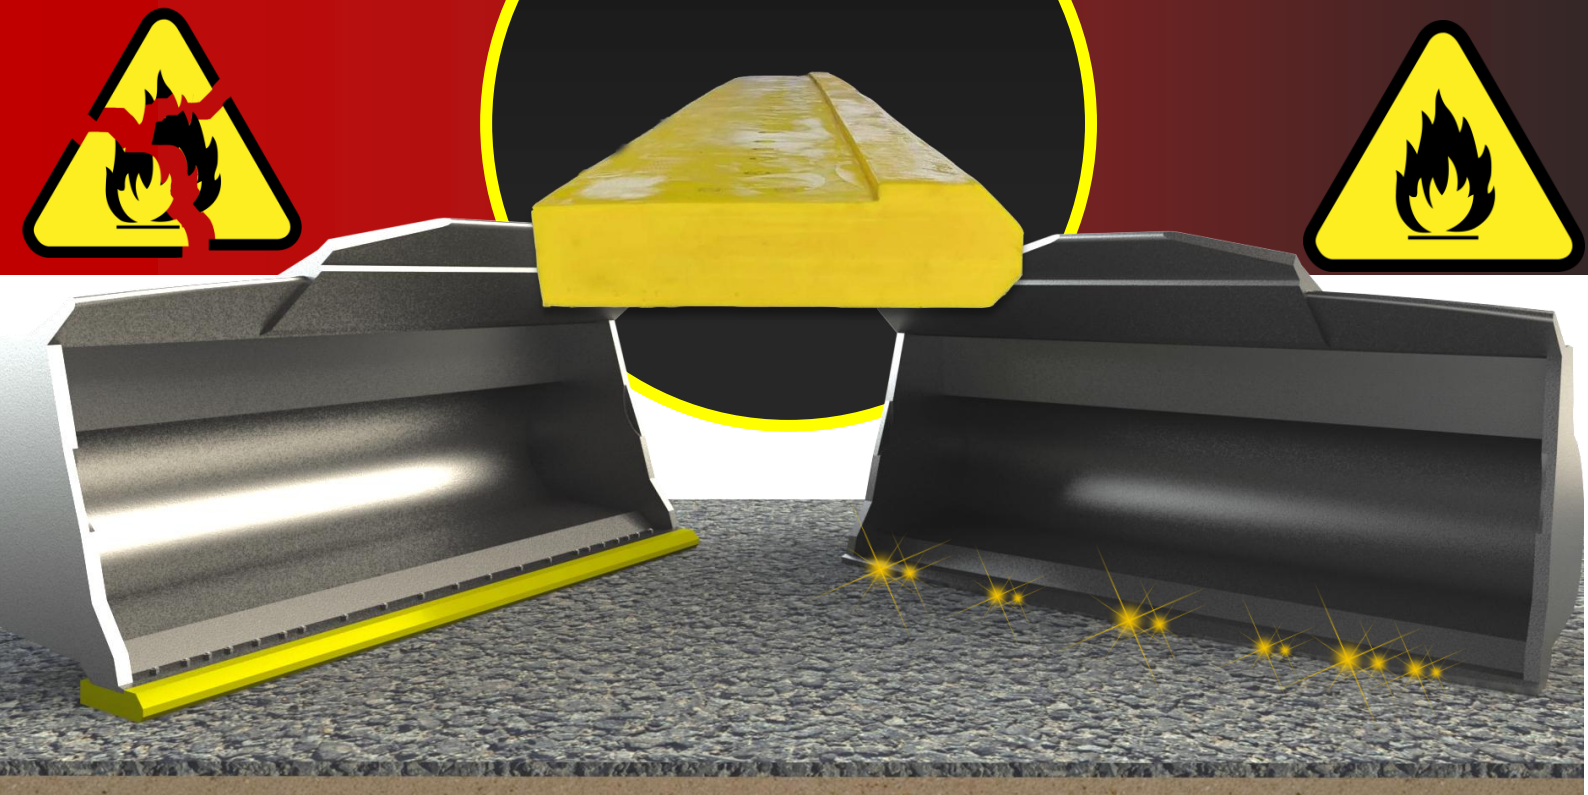

Our spark free polyurethane cutting edges have a solid steel plate inside to resist the mechanical stress given by the bucket pushing against the ground. They are fastened to the bucket with strong structural bolts and nuts. The bolt and nut application allows the rapid change of our spark free polyurethane cutting edges once worn out. Our cutting edges are suitable to every bucket model and brand. Contact us to understand how we can apply our polyurethane cutting edges to your wheel loaders. Your fire hazards will disappear.

