


EUROGOMMA

Polyurethane dewatering panels

EUROGOMMA supplies standard and custom made polyurethane dewatering panels.

Standard panels can be bolted to or clamping into the machine frame and are available in the following dimensions:

Length	Width
1 ft (305 mm)	1 ft (305 mm)
750 mm	300 mm
750 mm	400 mm
1000 mm	300 mm
1000 mm	400 mm
1500 mm	300 mm
1500 mm	400 mm

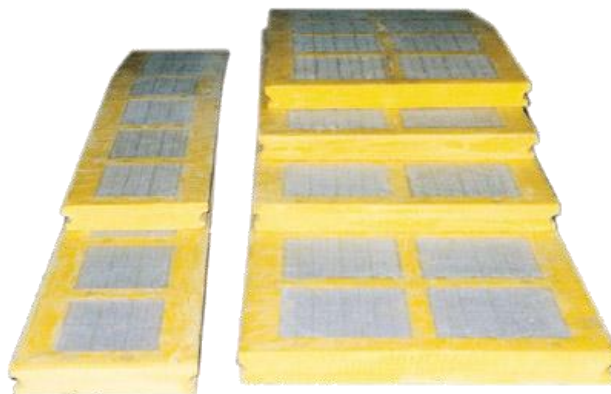

Standard apertures:

Aperture	Width
0,1mm	11mm
0,2mm	11mm
0,3mm	11mm
0,4mm	11mm
0,5mm	11mm
0,6mm	11mm
0,7mm	11mm
0,8mm	11mm
0,9mm	11mm
1 mm	15mm
1,5mm	15mm
2,0mm	15mm

Our custom made polyurethane panels are available in any size and with every requested aperture.

We usually manufacture also dewatering panels with elastic perforated areas which are suitable to applications with hole-blinding problems. Besides we supply complementary items such like lateral bars and wedges.

